INSTALLATION INSTRUCTIONS

For Model # 25000, 25001, 25002 (Rev 12/09/2003)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE (Fig. 1)

1. Shut off power at the circuit breaker and remove old fixture from ceiling, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach Circular Strap (B) using Junction Box Screws (C) to the Junction Box (A). The side of the Circular Strap marked “GND” must face out.
4. Thread Studs (D) into the pre- drilled holes of the Circular Strap (B), same distance apart as the hole in the canopy.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture’s Ground Wire to it. Otherwise, connect the fixture’s Ground Wire directly to the crossbar using the Green Screw provided.

FINISHING THE INSTALLATION (Fig. 1)

6. Place the Canopy (E) over the junction box and thread studs through the Canopy. Secure assembly with Cap Nut (G).
7. Install the light bulb in accordance with the fixture’s specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**
8. Align predrilled hole on the Bulb Cover (I) and the hole from the socket. Secure assembly with screw (F).
9. Cover the light bulb assembly with Lamp Shade (K) and secure with Shade Screws (J)

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1


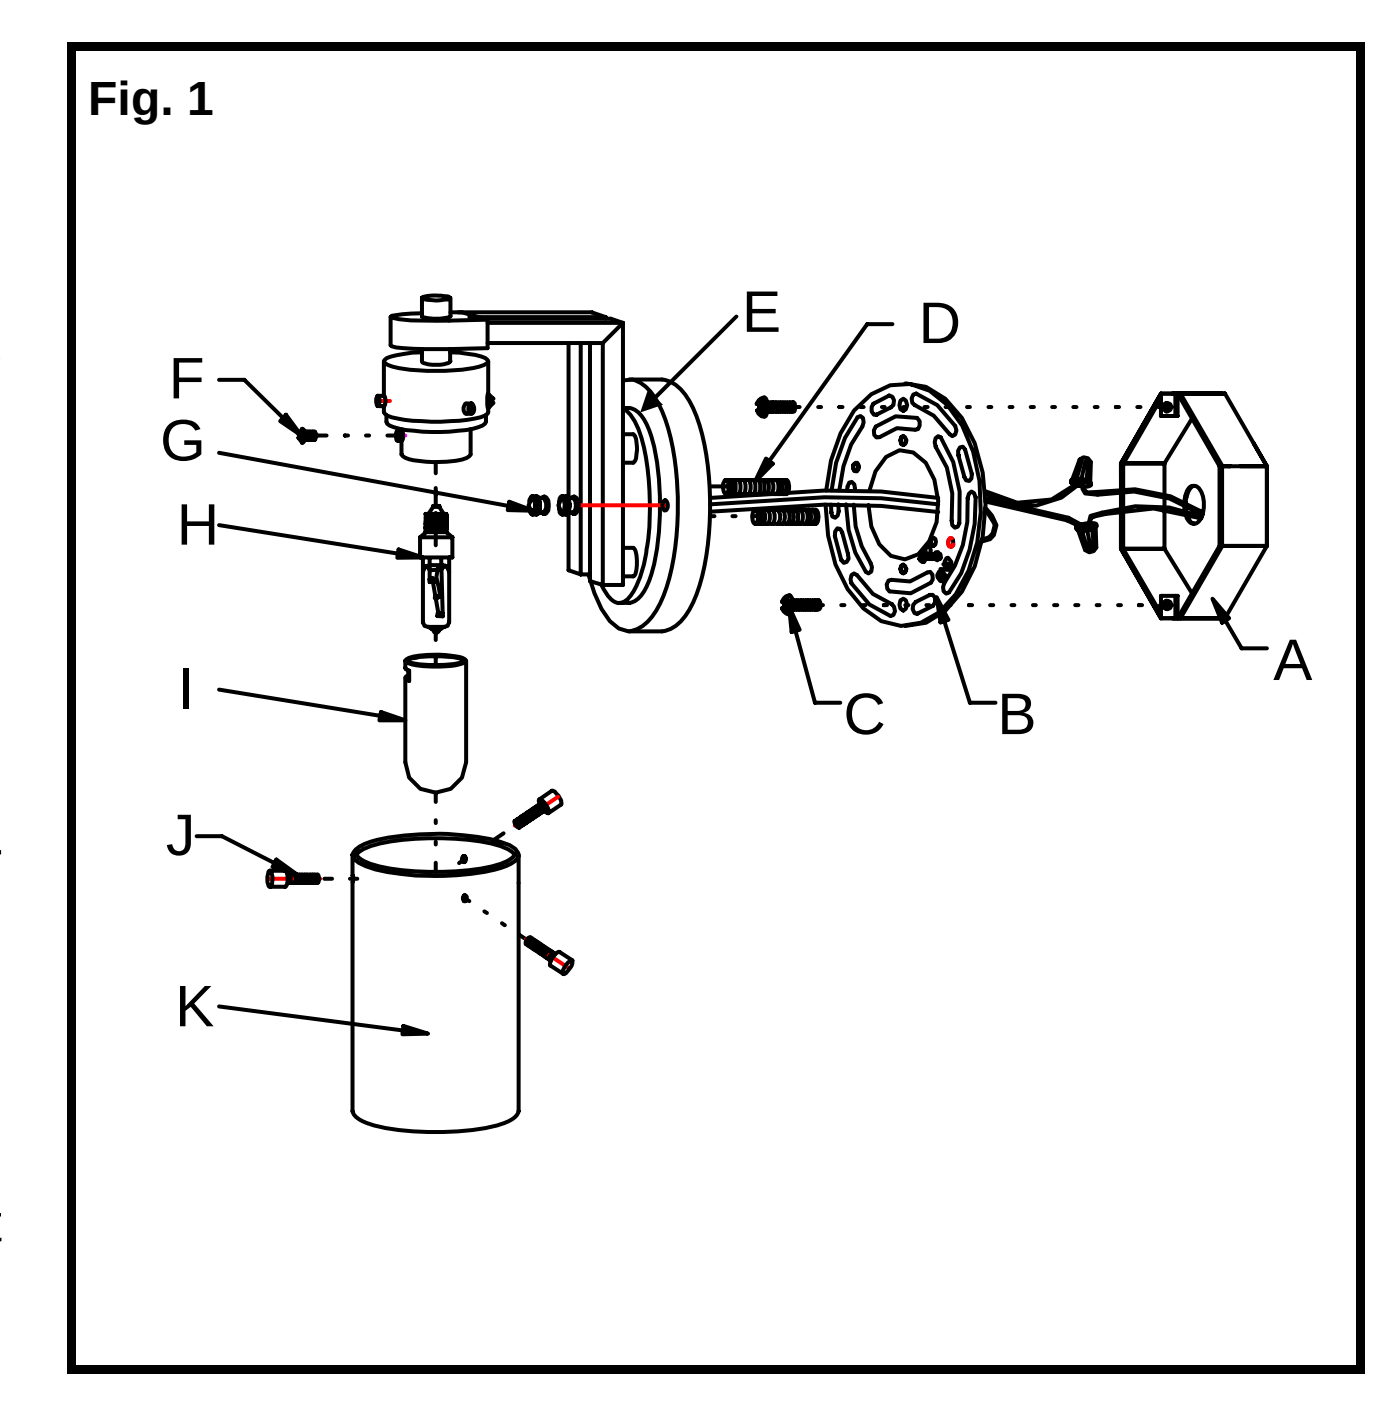


Fig. 2



MIN 90℃ SUPPLY CONDUCTORS

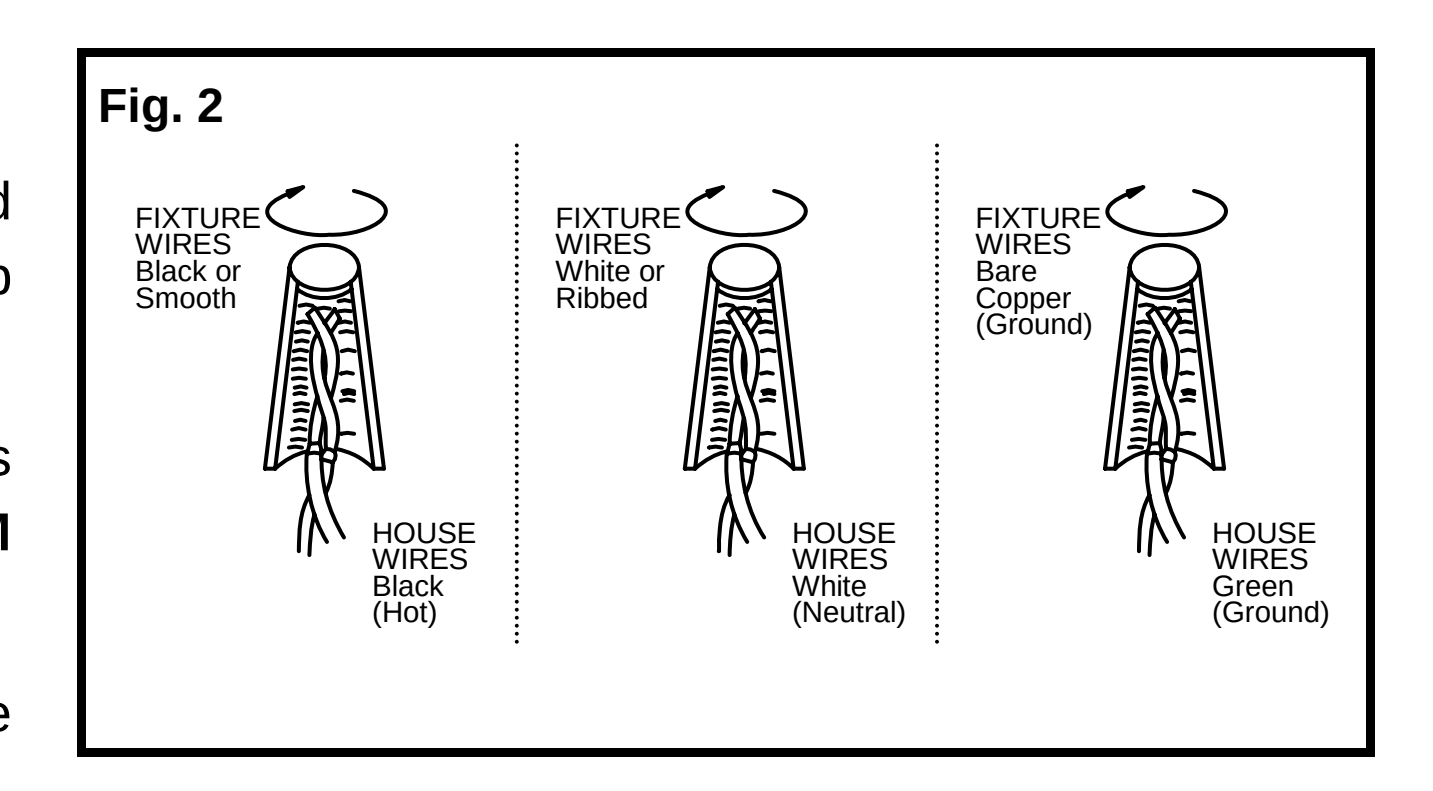

In the event that you should have any installation question or are missing parts, please contact **Customer Service**. Customer service may be reached weekdays a ***1-800-527-0998*** between the hours of 8:00am and 5:00pm PST (Pacific Standard Time).

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339

LA-750E/S

INSTRUCCIONES PARA LA INSTALACION

Para Modelo # 25000, 25001, 25002 (Rev 12/09/2003)

ADVERTENCIA! CORTE LA CORRIENTE DESDE EL FUSIBLE O EL INTERRUPTOR CENTRAL

ENSAMBLAJE DE LA LAMPARA (Fig. 1)

1. Corte la corriente en el circuito principal y saque la lampara vieja incluyendo la barra transversal.

2. Desempaque cuidadosamente su nueva lampara y coloque todas las partes en una superfice despejada. Tenga cuidado de no perder las partes pequeñas que son necesarias para la instalacion.

3. Coloque la Abrazadera Circular (B) con los Tornillos de la Caja de Union (C) y montelo a la Caja de Union (A). Ell lado marcado “GND” deben quedar hacia afuera.

4. Colloque los Tachones (D) en los abujeros de la Abrazadera Circular (B). A la misma distancia de la Cubierta.

CONECTANDO LOS ALAMBRES (Fig.2)

5. Conecte el alambrado electrico como se muestra en la (Fig.2), use un conector de plastico para asegurar la conexion. Si su caja de union tiene un alambre de tierra (verde o de cobre), conectelo al alambre de tierra de la lampara. Si no tiene, entonces conecte el alambre de tierra de la lampara directamente a la barra transversal usando el tornillo verde incluido.

TERMINANDO LA INSTALACION (Fig.1)


6. Levante la Cubierta (E) sobre los Techones asegurando la Cubierta al Techo con las Tuercas Decorativas (G).


7. Instale los focos de acuerdo a las especificaciones. **NO EXCEDA MAS DE LOS VATIOS ESPECIFICADOS!!**

8. Alinie los agujeros de la Cubierta del Foco (I) con los agujeros del Socket asegurela con los Tornillos (F).

9. Cubra el ensamble del Foco con la Cubierta (K) y asegure con los Tornillos de la Cubierta (J).

   Su instalacion a terminado, conecte la corriente electrica y pruebe la lampara.

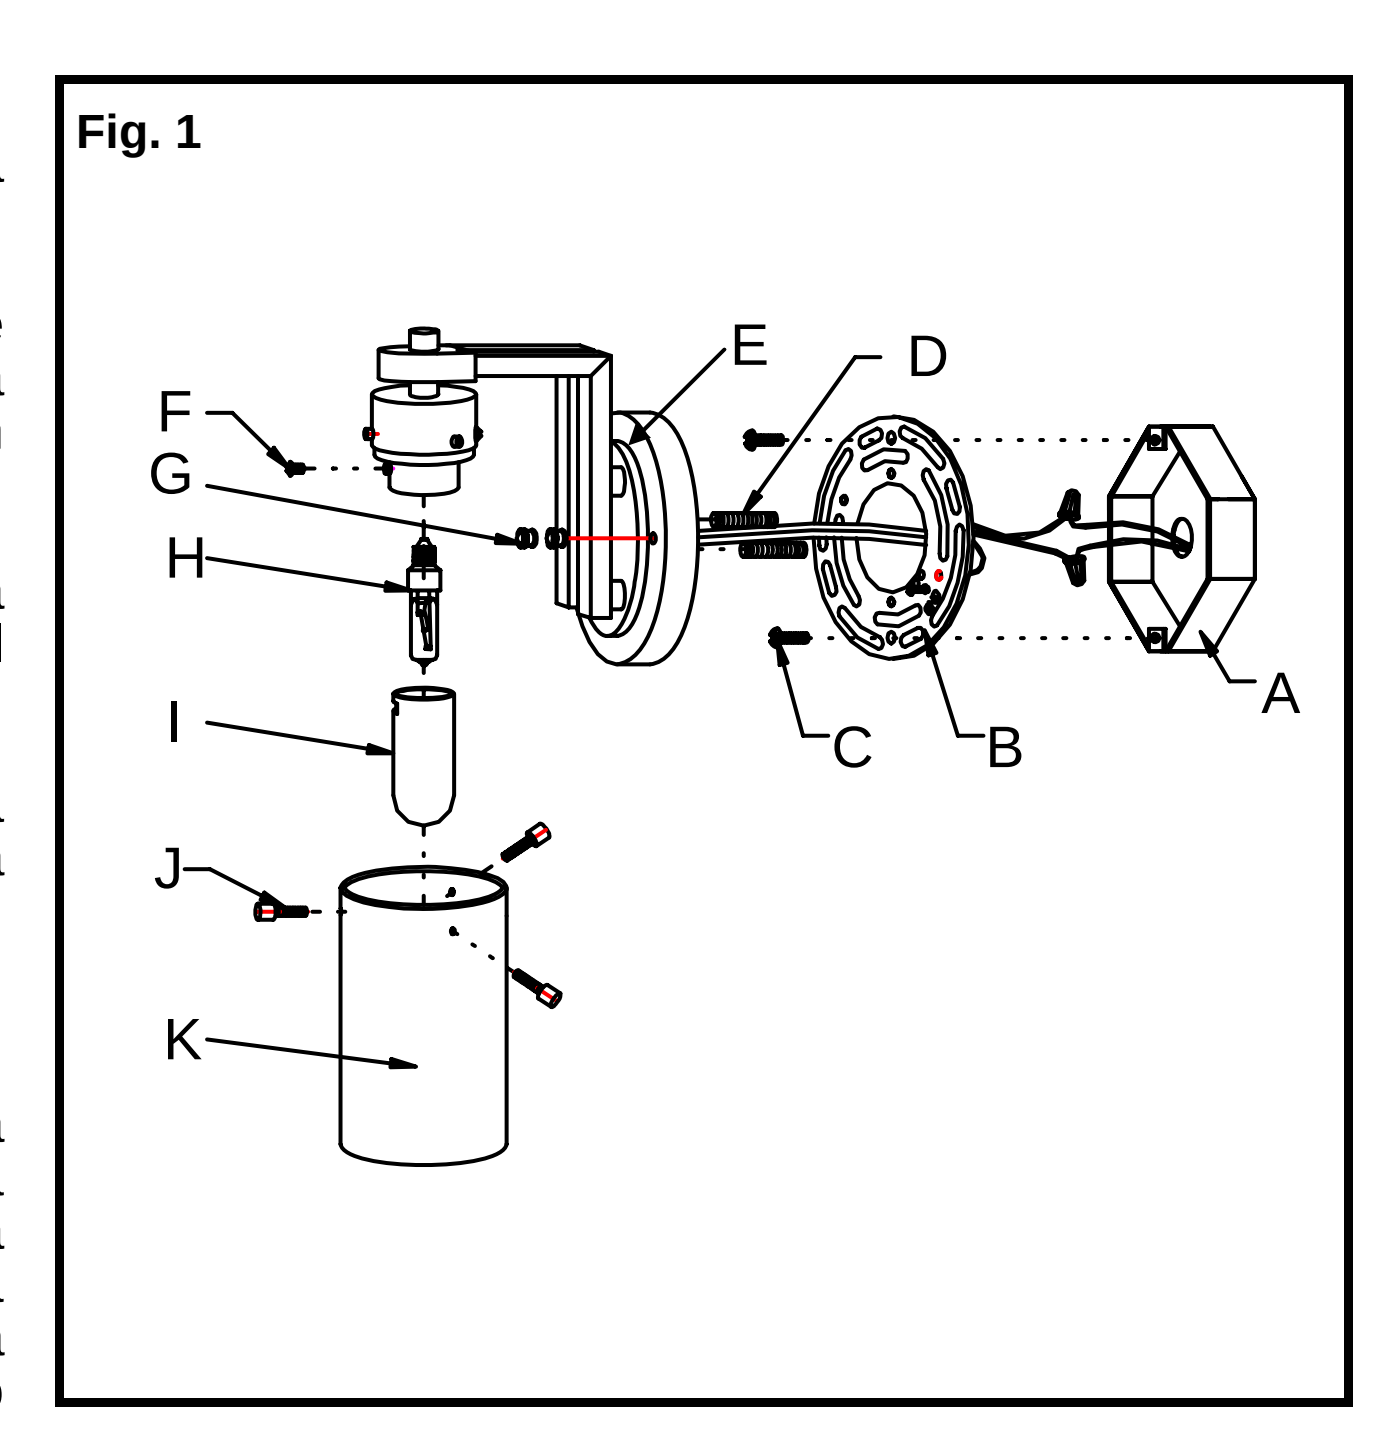

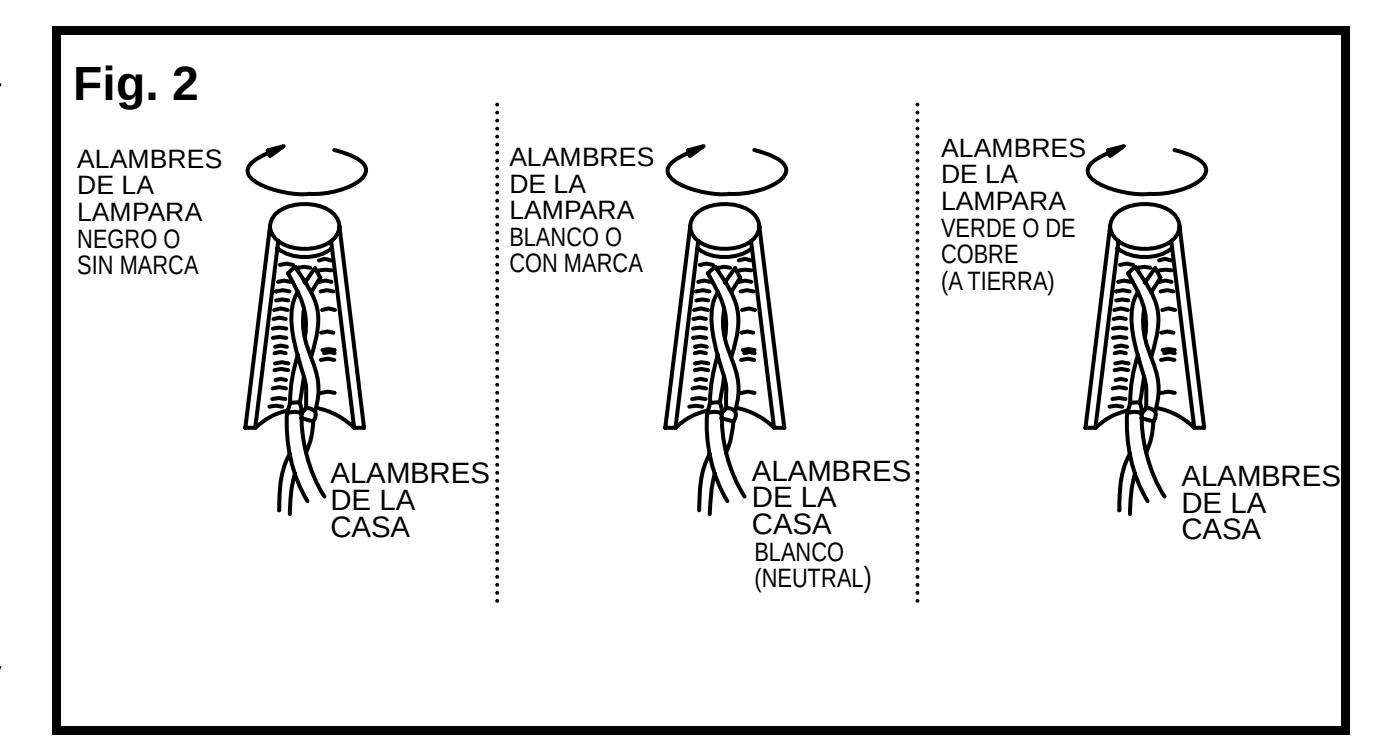

Nota: La ilustracion (Fig 1) en este manual esta para los propositos de la instalacion solamente. Puede o no puede ser identical al accesorio comprador.

CONDUCTORES DE ALIMENTACION CON MINIMO DE 90℃



En caso de preguntas sobre la instalacion o le faltaron partes, porfavor hablar al departamento de **Servicio al Cliente** al **1-800-527-0998** de Lunes a Viernes de 8:00 a.m. a 5:00 p.m. PST (Tiempo del Pacifico).

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339

LA-750E/S